



RECESSED DOWNLIGHT



OPTIMA VISAGE II
RECESSED LED DOWNLIGHTS

**FOR NEW RETAIL OR
RENOVATION INSTALLATIONS**



APPLICATIONS

This LED retail display light is a direct replacement for the energy consuming 70W-150W metal halide shop-lights.

This high powered lamp is perfect for over display shelving, centre display benches or broad retail spaces.

FEATURES & BENEFITS

- CoolTech-Engineered for lower operating temperatures
- Up to 70% energy savings
- High colour rendering index >80 to replicate natural daylight
- Easy to install

	10W	15W	35W	45W
--	-----	-----	-----	-----

GENERAL

Model Number	OPT-VISAGEII-10	OPT-VISAGEII-15	OPT-VISAGEII-35	OPT-VISAGEII-45
Dimensions (mm)	96x68 (Cut out:85-90)	145x102 (Cut out:120-130)	180x128.5 (Cut out:165-170)	180x128.5 (Cut out:165-170)
Weight	0.25KG	0.55KG	1.15KG	1.15
Sail Area	N/A			
Category	Recessed Downlights			
Lifetime (L70)	Reported: >90,000 hrs & Calculated: Up to 150,000 hrs			
IP & IK Ratings	IP20			
Warranty	5 years			
Cable & Plug	0.6m Cable & PLUG with AU approved Driver			
Storage Temperature	-20°C ~ 65°C			
Operating Temperature	-20°C ~ 45°C			

OPTICAL

Beam Angle	24°	45°, 60°		
Lumens	800lm	1200lm	3500lm	4300lm
LED Type	Citizen COB CLU056-3626C1-273H1D7			
No. of LED's	1			
LED Colour Temp	3000K, 4000K, 5000K, 6000K			
CRI	>80			

ELECTRICAL

Driver Type	BTON Dimmable Driver			
Input Voltage	200-240 VAC, 50/60 Hz			
Power Factor	>0.9			
Inrush Current	25.6A		20.6A	
Output Voltage	23-40Vdc			
Output Current (Max.)	0.22A	0.35A	0.80A	1.05A
Dimming	TRIAC Dimmable			
Recommended Dimmers	Clipsal LED Dimmer 32ELEDM, Trader Dimpala Eclipse			
Sensor Capability	No			

COMPLIANCE



AS/NZS IEC 61347.2.13
AS/NZS 61347.1


ISO 9001

SKU

ORDERING

RDL OPT Visage II 10W 4K 24°	CP9343907004151
RDL OPT Visage II 15W 4K 60°	CP9343907004152
RDL OPT Visage II 35W 4K 60°	CP9343907004153
RDL OPT Visage II 45W 4K 60°	CP9343907004154

RECESSED DOWNLIGHT




OPTIMA VISAGE II
RECESSED LED DOWNLIGHT


LUMINOUS INTENSITY DISTRIBUTION FOR OPTIMA VISAGE II

25° | 60°


10W/ UGR<5/ 80LM/W

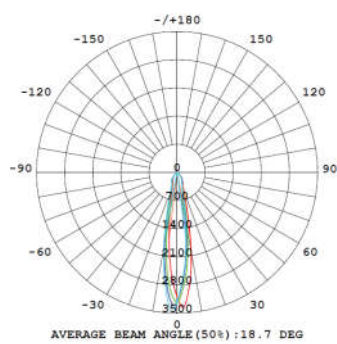


Total Flux: 808lm

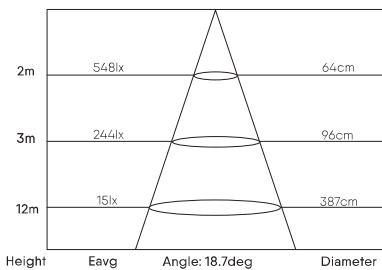


15W/ UGR<17/ 80LM/W

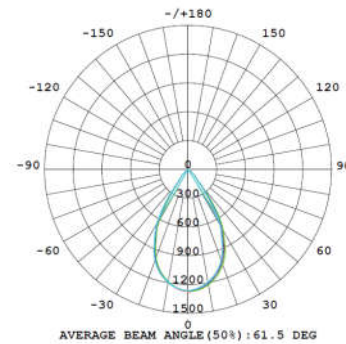


Total Flux 1180lm

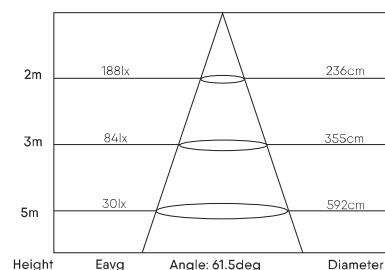

35W/ UGR<30/ 105LM/W

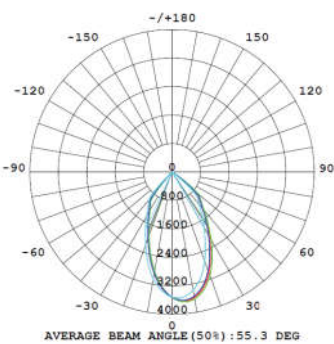


Total Flux: 3608lm

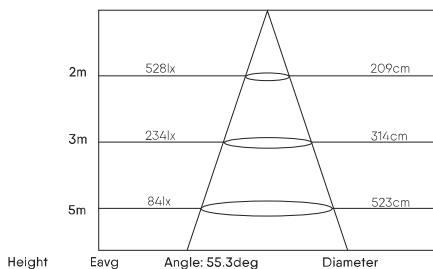


60°

45W/ UGR<30/ 110LM/W

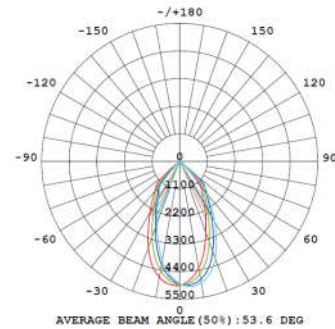


Total Flux 4749lm

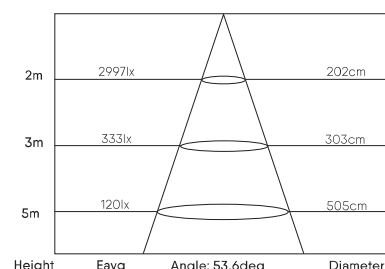


DIMENSIONAL DRAWINGS

OPT-VISAGEII-10

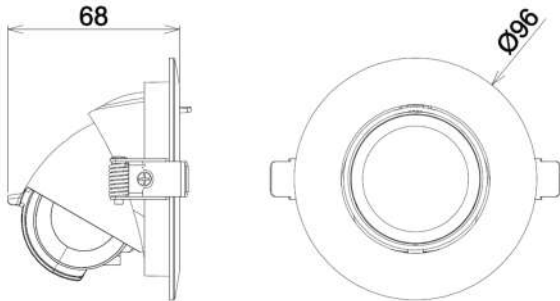

OPT-VISAGEII-15

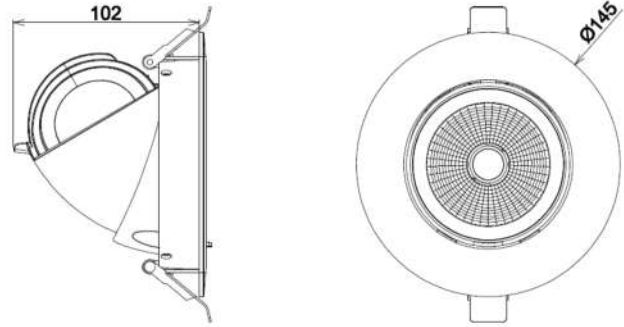

OPT-VISAGEII-35 & OPT-VISAGEII-45

